



Technical Specification

LED FLOOD LIGHT SERIES

VAS - 777 3000K - 6500K


LUMILEDS

IP65



Material	Alumunium
Body Color	White
Dimension	L x W x H (mm)
10W	107.3 x 84 x 15.5
20W	139.6 x 103.2 x 18.5
30W	176.8 x 127.6 x 18.5
50W	222.8 x 163.6 x 18.5
100W	290 x 214 x 18.5
150W	340 x 248.5 x 38.6
200W	393.2 x 279.9 x 41.6

Lumen	100Lm/W
PF	> 0.9
CRI	Ra > 80

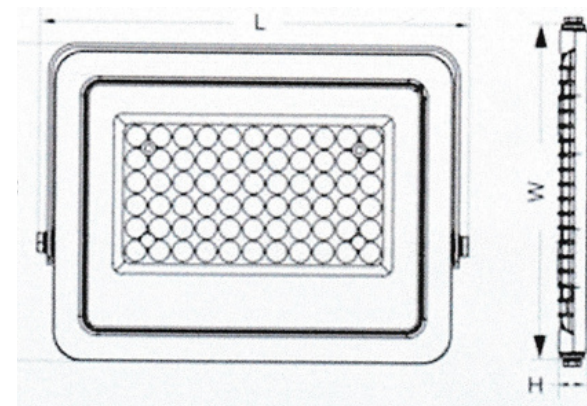

MODEL	LED/WATTAGE	COLOR	VOLTAGE	LEN ANGLE	LIFESPAN
777	10W	Single Color	AC 180-260V	90°	25.000hs
777	20W	Single Color	AC 180-260V	90°	25.000hs
777	30W	Single Color	AC 180-260V	90°	25.000hs
777	50W	Single Color	AC 180-260V	90°	25.000hs
777	100W	Single Color	AC 180-260V	90°	25.000hs
777	150W	Single Color	AC 180-260V	90°	25.000hs
777	200W	Single Color	AC 180-260V	90°	25.000hs



Technical Specification

LED FLOOD LIGHT SERIES


VAS - 228 3500K - 6500K

LUMILEDS

IP65



Material	Alumunium
Body Color	Grey
Dimension	L x W x H (mm)
10W	90 x 120 x 25
20W	150 x 120 x 25
30W	165 x 190 x 30
50W	180 x 210 x 35
100W	240 x 280 x 35
150W	260 x 240 x 28
Lumen	100Lm/W
CRI	Ra > 80

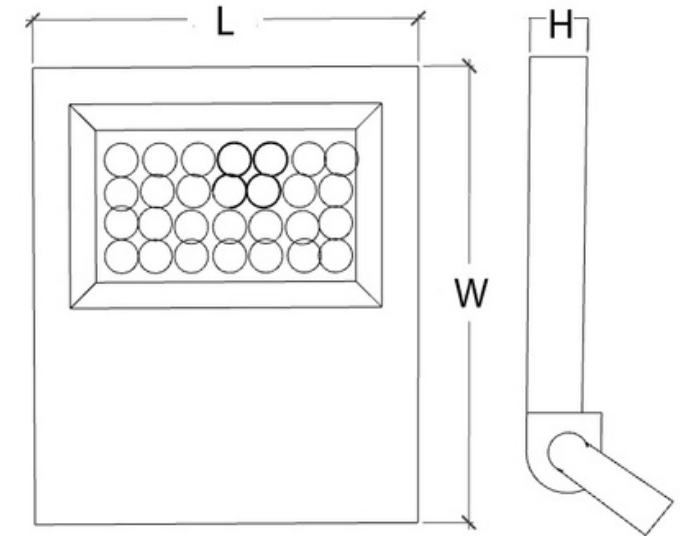

MODEL	LED/WATTAGE	COLOR	VOLTAGE	LEN ANGLE	LIFESPAN
VAS-228	10W	Single Color	AC 100 - 240V	90°	25.000hs
VAS-228	20W	Single Color	AC 100 - 240V	90°	25.000hs
VAS-228	30W	Single Color	AC 100 - 240V	90°	25.000hs
VAS-228	50W	Single Color	AC 100 - 240V	90°	25.000hs
VAS-228	100W	Single Color	AC 100 - 240V	90°	25.000hs
VAS-228	150W	Single Color	AC 100 - 240V	90°	25.000hs




Technical Specification

LED FLOOD LIGHT SERIES

VAS - 228



Material	Alumunium
Body Color	Grey
Dimension	L x W x H (mm)
30W	165 x 190 x 30
50W	180 x 210 x 35
100W	240 x 280 x 35
Lumen	100Lm/W
CRI	Ra > 80

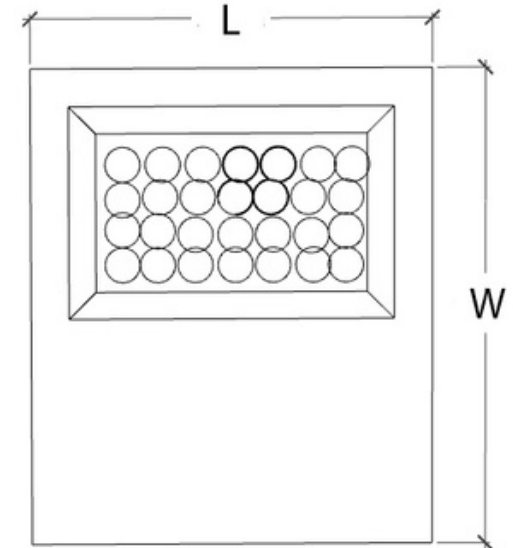

MODEL	LED/WATTAGE	COLOR	VOLTAGE	LEN ANGLE	LIFESPAN
VAS-228	30W	RGB	AC 100 - 240V	90°	25.000hs
VAS-228	50W	RGB	AC 100 - 240V	90°	25.000hs
VAS-228	100W	RGB	AC 100 - 240V	90°	25.000hs



LED FLOOD LIGHT SERIES

VAS - 318 3500K - 6500K



Technical Specification

Material	Alumunium
Body Color	Black
Dimension	L x W x H (mm)
300W	455 x 350 x 92
400W	522 x 330 x 80
500W	625 x 330 x 80
Lumen	150Lm/W
PF	> 0.9
CRI	Ra > 80


MODEL	LED/WATTAGE	COLOR	VOLTAGE	LEN ANGLE	LIFESPAN
318	300W	Single Color	AC 100-240V	90°	25.000hs
318	400W	Single Color	AC 100-240V	90°	25.000hs
318	500W	Single Color	AC 100-240V	90°	25.000hs




Technical Specification

LED FLOOD LIGHT SERIES

VAS - 218 3500K - 6500K

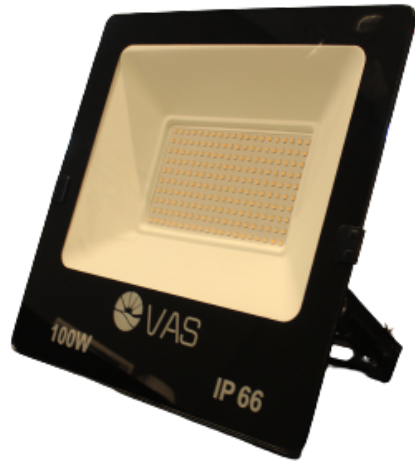

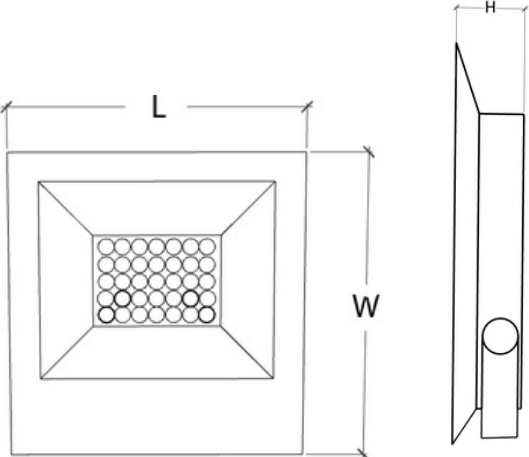Material	Alumunium	Lumen	85 Lm / W
Body Color	Black	PF	> 0.9
Dimension	L x W x H (mm)	CRI	Ra > 80
10W	130 x 130 x 37		
20W	198 x 190 x 37		
30W	235 x 240 x 40		
50W	299 x 284 x 48		
100W	340 x 330 x 50		
150W	348 x 353 x 55		
200W	422 x 417 x 61		

MODEL	LED/WATTAGE	COLOR	VOLTAGE	LEN ANGLE	LIFESPAN
VAS-218	10W	Single Color	AC 100-240V	90°	25.000hs
VAS-218	20W	Single Color	AC 100-240V	90°	25.000hs
VAS-218	30W	Single Color	AC 100-240V	90°	25.000hs
VAS-218	50W	Single Color	AC 100-240V	90°	25.000hs
VAS-218	100W	Single Color	AC 100-240V	90°	25.000hs
VAS-218	150W	Single Color	AC 100-240V	90°	25.000hs
VAS-218	200W	Single Color	AC 100-240V	90°	25.000hs




SOLAR FLOOD LIGHT SERIES

VAS - 778 SL 6500K



Technical Specification

Material	Alumunium
Body Color	Black
Dimension	L x W x H (mm)
Lamp	455 x 350 x 92
Solar Panel	450 x 350 x 17
Charging	12H
Lumen	1300 Lm
CRI	Ra ≥ 70
Temperature	45° - (-20°)

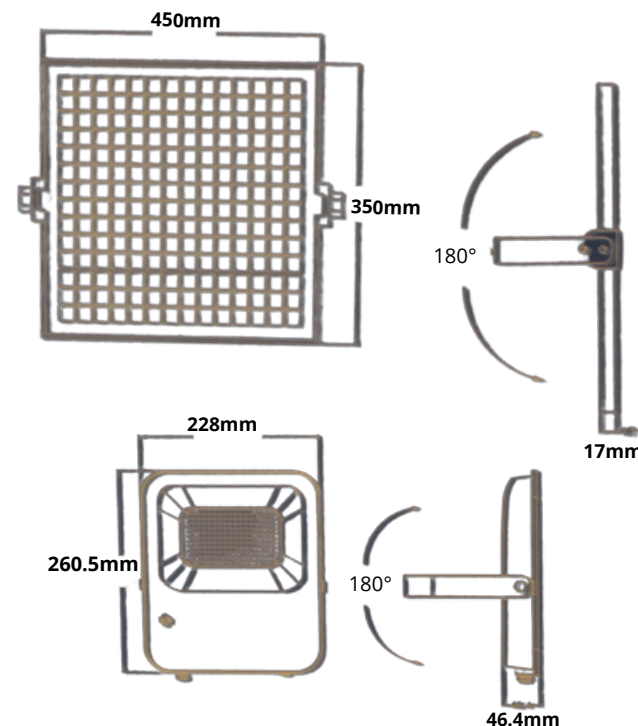

MODEL	LED/WATTAGE	COLOR	BATTREY / VOLTAGE	LEN ANGLE	LIFESPAN
778SL	100W	Single Color	20.000mAh / DC 3.2V	120°	25.000




SOLAR STREET LIGHT SERIES

VAS-718SL 6500K



Technical Specification

Material	Alumunium
Body Color	Grey
Dimension	L x W x H (mm)
100W	107.3 x 84 x 15.5
200W	139.6 x 103.2 x 18.5
Lumen	2200lm
Charging	5 - 8h
CRI	Ra ≥ 70

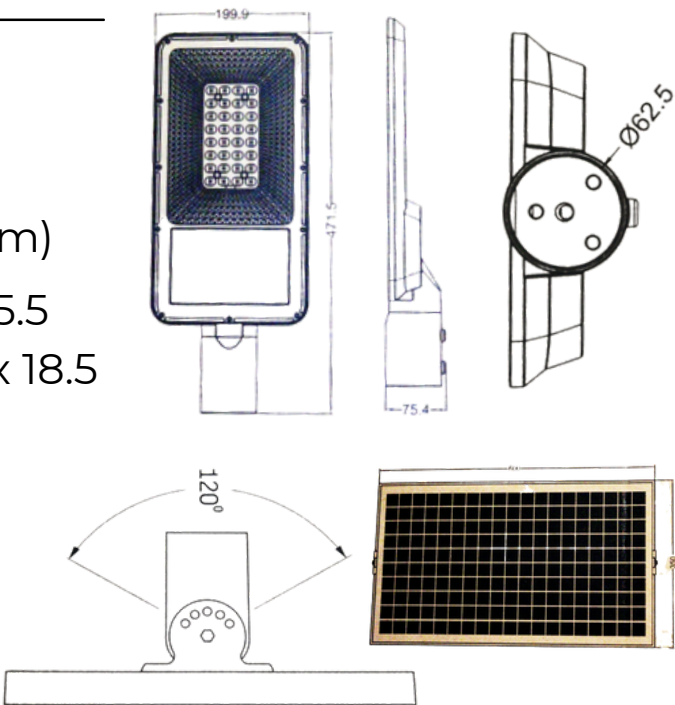

MODEL	LED/WATTAGE	COLOR	BATTREY	BEAM ANGLE	LIFESPAN
VAS-718SL	100W	Single Color	30.000mAh	90°x130°	25.000hs



LED STREET LIGHT SERIES

VAS-709




50W : 3500k - 6500K
100W : 3500k - 6500k
150W : 3500k



Technical Specification

Material	Alumunium
Body Color	Black
Dimension	L x W x H (mm)
50W	250 x 520 x 80
100W	250 x 520 x 80
150W	265 x 620 x 80
Lumen	100 Lm / Watt
CRI	80 Luminous

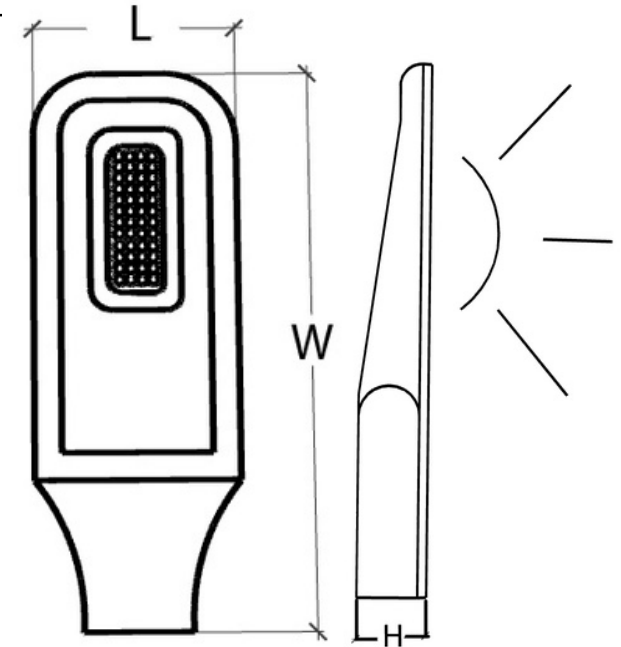

MODEL	LED/WATTAGE	COLOR	VOLTAGE	LEN ANGLE	LIFESPAN
VAS-709	50W	Single Color	AC 85V - 300V	120°	25.000hs
VAS-709	100W	Single Color	AC 85V - 300V	120°	25.000hs
VAS-709	150W	Single Color	AC 85V - 300V	120°	25.000hs



LED STREET LIGHT SERIES


VAS-708

3500k - 6500k
60W : only 6500k



Technical Specification

Material	Alumunium
Body Color	Black
Dimension	L x W x H (mm)
30W	110 x 300 x 65
60W	50 x 400 x 70
100W	80 x 500 x 70
120W	180 x 500 x 70
Lumen	90-100Lm/watt
CRI	80 Luminous

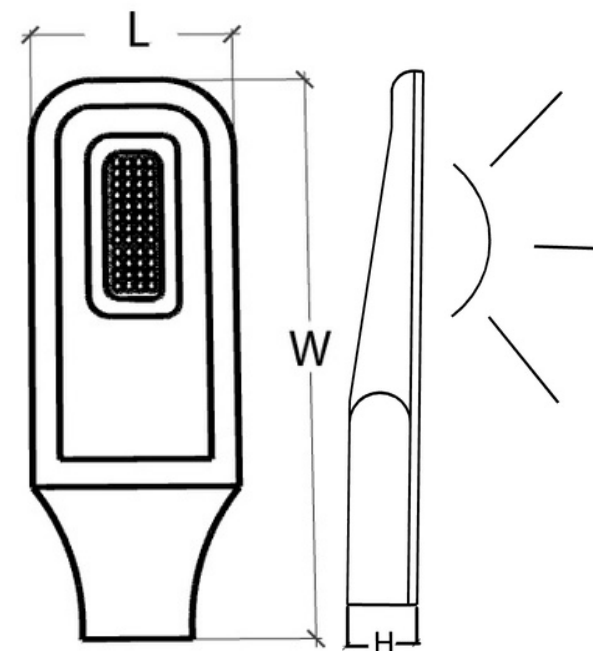

MODEL	LED/WATTAGE	COLOR	VOLTAGE	LEN ANGLE	LIFESPAN
VAS-708	30W	Single Color	AC 100-240V	90°	25.000hs
VAS-708	60W	Single Color	AC 100-240V	90°	25.000hs
VAS-708	100W	Single Color	AC 100-240V	90°	25.000hs
VAS-708	120W	Single Color	AC 100-240V	90°	25.000hs